

MODEL 7763MR (DONNELLY) FOOT STOOL is our two-step version and provides a 24" x 8" top step welded to a larger base (24" x 16"). Two welded rod braces below the bottom step provide extra reinforcement. Fully-welded, stainless-steel construction.

Add the **optional handrail to 41" height - Model 7763MR-HR.**

| Model No. | Part No. | Dimensions | Ship Wt. (lb) est. |
|-----------|------------|-------------------------|--------------------|
| 7763MR | 1017763000 | 16"D 24"W 16"H | 26 |
| 7763MR-HR | 1017763100 | 16"D 24"W 16"H, (41"HR) | 39 |



H-Brace offers extra reinforcement.


Option: Handrail attachment.



MODEL 7764MR-HR STOOL is designed with a larger platform and two 41" high handrails for easy access and support. Bracing below the bottom step provides extra reinforcement. All components are nickel-bearing.

| Model No. | Part No. | Dimensions | Ship Wt. (lb) est. |
|-----------|------------|--|--------------------|
| 7764MR-HR | 1012041096 | Base-36"L 24"W 8"H Step-36"L 12"W 8"H | 115 |

Bracing below the bottom step offers extra reinforcement.

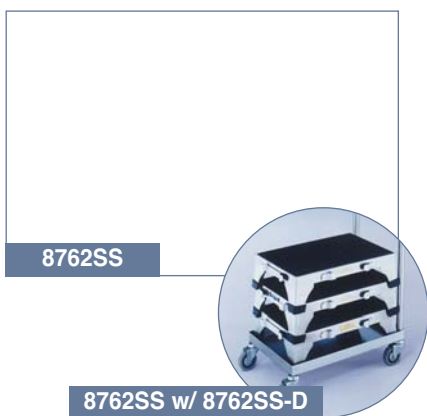

MODEL 8762SS (EZ STACKING) STOOL provides a real storage solution, while also locking side-to-side or end-to-end to create a larger stool or platform. Rock solid and versatile. Constructed from stainless steel with rubber treading on the platform and rubber tips on the feet. Designed for surgery suites, diagnostic centers, outpatient facilities, and exam rooms.

Add the **optional dolly 8762SS-D for easy transportability.**



8762SS locked end-to-end

| Model No. | Part No. | Dimensions | Ship Wt. (lb) est. |
|-----------|------------|-------------------|--------------------|
| 8762SS | 1018762000 | 12"D 18"W 5-1/4"H | 13 |
| 8762SS-D | 1018762300 | 13"D 23"W 39"H | 20 |

Option: Dolly for transport.

All Blickman foot stools (except Model 1250 and 1251) are constructed from nickel-bearing components and are SUITABLE FOR MR ENVIRONMENTS.

