



OPERATING ROOM CONSOLES



THE OPERATING ROOM CONSOLE featured on this page typifies a combination of assembled, independent cabinet units. By adding or deleting units you can easily design other console arrangements. Select solid or glass doors with or without locks. Locks on cabinets can be keyed alike or independently. These cabinets can also be furnished as freestanding cabinets on optional, stainless-steel bases and/or with optional, stainless-steel sloping tops. Stainless-steel perimeter recessing trim may be purchased with all built-in installations.

Blickman prides itself on its factory-built, modular design concept for console cabinets, which offers virtually unlimited flexibility to successfully meet specific requirements, while reducing costs and standardizing quality. Moreover, all Blickman products come supported by its industry-unique Lifetime Limited Warranty. See the Blickman website (www.blickman.com) for warranty details.

MATERIALS - Stainless Steel, 300 Series, nickel-bearing, 1/4" (0.55) thick, clear tempered sheet glass.


GAUGES - Cabinet bodies and shelves-18 gauge. Drawers, doors and recessing trim-20 gauge.

CONSTRUCTION - Console consists of individual cabinets arranged in series to meet particular operating room needs. Cabinets are constructed with sides, backs, tops and bottoms welded into rigid, self supporting body shells, with facing joints welded, ground and polished, presenting a flush face, to which drawers and doors can be fitted in the same plane.


WELDING - All welding accomplished by heli-arc method. All exposed welds ground smooth.

FINISH - All exposed stainless steel surfaces are free of pit marks, weld seams and scale and polished to a satin finish.

OPTIONS - Recessing trim for built-in installations. Stainless steel bases and or sloping tops for free standing units. Locks on drawers and/or doors. Knob latching in lieu of dummy knobs. Solid stainless steel doors in lieu of glass.



PASS-THROUGH VERSIONS for built-in applications provide doors on the front and back of any console cabinet, except for Model DC-24. Now you can load warming cabinets from outside the surgical area and access contents from the inside.

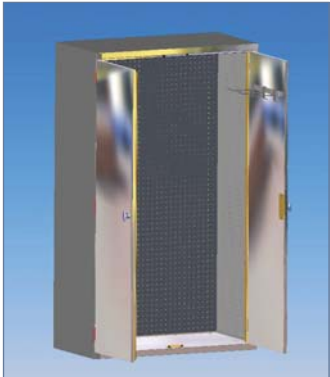

MODELS TA35 AND TA47 TABLE ACCESSORIES CABINETS include a removable stainless pegboard for storing endoscopy equipment, OR table accessories.

Model No.	Part No.	Width	Height	Depth	Feature
TA35	1718235000	35" (88.90)	60" (152.40)	18" (45.72)	pegboard
TA47	1718247000	47" (119.38)	60" (152.40)	18" (45.72)	pegboard

Cabinet is furnished with solid, double pan doors, channel reinforced, hung on three semi-concealed stainless steel hinges. Right hand door fitted with two point up and down knob latching, left hand door with astragal, dummy knob and spring loaded nylon roller catch. Inner door panels are provided with 11 gauge channel brackets for the support of three removable and adjustable 1/4" (0.64) diameter stainless steel rod hooks per door. Cabinet interior, back and sides, are lined with a removable 18 gauge stainless steel pegboard.

NOTE: Metric dimensions are shown in centimeters.
Specifications may be improved and dimensions changed without prior notice.



The
Physician's Resource
for Medical Equipment, Inc.

Sales and Service of Cardiology and Surgical Equipment and Supplies